

## DC-DC CONVERTER AER10

RAILWAY CONVERTER.

### FOR PCB MOUNTING



### HIGHLIGHTS

- + Output Power up to 10 Watts
- + Efficiency up to 89 %
- + Wide Input Range
- + Wide Temperature Range
- + RoHS compliance
- + According to EN50155
- + Remote On/Off

### INPUT

Input Voltage Nominal 12/24 VDC, 36/48 VDC, 72/110 VDC

### OUTPUT

Output Voltage	5, 12, 15, 24 V and $\pm 12$ , $\pm 15$ V
Initial Set Accuracy	< 1 %*
Output Voltage Balance	Dual Output, Balanced Loads $\pm 2,0$ %
Minimum Load	No minimum load
Short Circuit	Continuous short circuit proof
Line Regulation	$\pm 0,2$ %
Load Regulation	Single Output $\pm 0,5$ % (0 % - 100 % load) Dual Output $\pm 1,0$ % (0 % - 100 % load)
Ripple & Noise	< 1 % pk-pk, 20 MHz bandwidth**
Start Time	50 ms
Max. Output Capacitance	See table page 2 - 5
Temperature Coefficient	$\pm 0.02$ %/°C

### FEATURES

Remote On/Off	See page 8
Trim	$\pm 10$ %, See page 7

### PROTECTION

Over Voltage Protection (OVP)	120-125% $V_{out nom}$
Over Current Protection (OCP)	See table page 2 - 5

### GENERAL

Product Standard	EN 50155
Isolation	Input to Output 4200 VDC, Reinforced Input or Output to case 2200 VDC
Isolation Resistance	> 1000 M $\Omega$ (@500 VDC)
Isolation Capacitance	max. 1,5 nF (100 kHz, 1 V)
Switching Frequency	Typ. 280 kHz
Lead Temperature	260°C (1,5 mm from case for 10 sec.)
Dimensions [mm]	50,8 x 25,4 x 11,0
Weight	40,5 g
MTBF	2.840.000h acc. to MIL-HDBK-217F (GB,25°)
Fire & Smoke	EN 45545-2

### ENVIRONMENTAL

Operating Ambient Temp.	-40°C up to +95°C
Operating Case Temp.	max. +105°C
Storage Temperature	-50°C to +125°C
Vibration / Shock / Bump	EN 61373, Cat. 1B

### EMC & SAFETY

EMC Standard	EN 50121-3-2
Conducted Emissions	EN 55032, FCC Level A, Class A***
ESD Immunity	EN 61000-4-2 Air $\pm 8$ kV, Contact $\pm 6$ kV, Criteria A
Burst	EN 61000-4-4 $\pm 2$ kV, Criteria A****
Surge	EN 61000-4-5 $\pm 2$ kV, Criteria A****
Conducted Immunity	EN 61000-4-6 10 Vrms, Criteria A
Radiated Immunity	EN 61000-4-3 10 V/m, Criteria A
Power Frequency Magnetic Field Immunity	EN 61000-4-8, 3 A/m, Criteria A
Safety	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report), IEC 60571 UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)

\* For  $T_{amb} = 25^\circ\text{C}$ ,  $V_{in nom}$ ,  $I_{out nom}$

\*\* 5  $V_o$ , 12  $V_o$  15  $V_o$  = Measured with a 10  $\mu\text{F}/25$  V MLCC  
24  $V_o$  = Measured with a 4,7  $\mu\text{F}/50$  V MLCC

\*\*\* In built-in condition our devices may show different EMC properties

\*\*\*\* See note 5 page 7

# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$ , unless otherwise specified.

## SINGLE OUTPUT

### SPECIFICATION Input 9 - 36 VDC (12/24 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10-24S05 AER10-24S05/K			AER10-24S12 AER10-24S12/K			AER10-24S15 AER10-24S15/K			AER10-24S24 AER10-24S24/K		
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
	ORDER NUMBER		11 75 11 1211 2 11 75 11 1214 5			11 75 11 1221 5 11 75 11 1224 8			11 75 11 1231 8 11 75 11 1234 2			11 75 11 1241 2 11 75 11 1244 5		
INPUT	Input Voltage Operating	V	9...36											
	Input Voltage Range	V	9...50 (t ≤ 100 ms)											
	Under Voltage Turn-on (typical)	V	9											
	Under Voltage Turn-off (typical)	V	7,5											
	Input Current @ Full Load	mA		496			485			481			474	
	Input Current @ No Load (typical)	mA	25											
	Standby Input Current (typical)	mA	2,5											
OUTPUT	Output Voltage	V	5			12			15			24		
	Output Current (typical)	mA	2000			835			670			417		
	Output Power	W	10											
	Max. Capacitive Load	μF			2200			330			220		100	
	Efficiency @ Full Load	%		84			86			87			88	
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery											
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5											

### SPECIFICATION Input 18 - 75 VDC (36/48 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10-48S05 AER10-48S05/K			AER10-48S12 AER10-48S12/K			AER10-48S15 AER10-48S15/K			AER10-48S24 AER10-48S24/K		
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
	ORDER NUMBER		11 75 11 1511 8 11 75 11 1514 2			11 75 11 1521 2 11 75 11 1524 5			11 75 11 1531 5 11 75 11 1534 8			11 75 11 1541 8 11 75 11 1544 2		
INPUT	Input Voltage Operating	V	18...75											
	Input Voltage Range	V	18...100 (t ≤ 100 ms)											
	Under Voltage Turn-on (typical)	V	18											
	Under Voltage Turn-off (typical)	V	16											
	Input Current @ Full Load	mA		245			240			241			242	
	Input Current @ No Load (typical)	mA	15											
	Standby Input Current (typical)	mA	2,5											
OUTPUT	Output Voltage	V	5			12			15			24		
	Output Current (typical)	mA	2000			835			670			417		
	Output Power	W	10											
	Max. Capacitive Load	μF			2200			330			220		100	
	Efficiency @ Full Load	%		85			87			87			86	
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery											
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5											

### SPECIFICATION Input 40 - 160 VDC (72/110 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10-110S05 AER10-110S05/K			AER10-110S12 AER10-110S12/K			AER10-110S15 AER10-110S15/K			AER10-110S24 AER10-110S24/K		
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
	ORDER NUMBER		11 75 11 1711 3 11 75 11 1714 6			11 75 11 1721 6 11 75 11 1724 9			11 75 11 1731 9 11 75 11 1734 3			11 75 11 1741 3 11 75 11 1744 6		
INPUT	Input Voltage Operating	V	40...160											
	Input Voltage Range	V	40...170 (t ≤ 100 ms)											
	Under Voltage Turn-on (typical)	V	40											
	Under Voltage Turn-off (typical)	V	37											
	Input Current @ Full Load	mA		111			107			107			107	
	Input Current @ No Load (typical)	mA	10											
	Standby Input Current (typical)	mA	2,5											
OUTPUT	Output Voltage	V	5			12			15			24		
	Output Current (typical)	mA	2000			835			670			417		
	Output Power	W	10											
	Max. Capacitive Load	μF			2200			330			220		100	
	Efficiency @ Full Load	%		82			85			85			85	
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery											
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5											

# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## DUAL OUTPUT

### SPECIFICATION Input 9 - 36 VDC (12/24 Vin nom) ; K = with Heatsink

TYPE		AER10-24D12 AER10-24D12/K			AER10-24D15 AER10-24D15/K		
ORDER NUMBER		11 75 11 1222 9 11 75 11 1225 3			11 75 11 1232 3 11 75 11 1235 6		
CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	9...36					
	Input Voltage Range	9...50 ( $t \leq 100\text{ ms}$ )					
	Under Voltage Turn-on (typical)	9					
	Under Voltage Turn-off (typical)	7,5					
	Input Current @ Full Load		485			481	
	Input Current @ No Load (typical)	25					
	Standby Input Current (typical)	2,5					
OUTPUT	Output Voltage	$\pm 12$			$\pm 15$		
	Output Current (typical)	$\pm 417$			$\pm 335$		
	Output Power	10					
	Max. Capacitive Load			150#			100#
	Efficiency @ Full Load	86			87		
	Short Circuit Current (typical)	hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
	Transient Response 75% / 100% Load Step, Recovery Time < 300 $\mu\text{s}$	$\pm 5$					

### SPECIFICATION Input 18 - 75 VDC (36/48 Vin nom) ; K = with Heatsink

TYPE		AER10-48D12 AER10-48D12/K			AER10-48D15 AER10-48D15/K		
ORDER NUMBER		11 75 11 1522 6 11 75 11 1525 9			11 75 11 1532 9 11 75 11 1535 3		
CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	18...75					
	Input Voltage Range	18...100 ( $t \leq 100\text{ ms}$ )					
	Under Voltage Turn-on (typical)	18					
	Under Voltage Turn-off (typical)	16					
	Input Current @ Full Load		234			238	
	Input Current @ No Load (typical)	15					
	Standby Input Current (typical)	2,5					
OUTPUT	Output Voltage	$\pm 12$			$\pm 15$		
	Output Current (typical)	$\pm 417$			$\pm 335$		
	Output Power	10					
	Max. Capacitive Load			150#			100#
	Efficiency @ Full Load	89			88		
	Short Circuit Current (typical)	hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
	Transient Response 75% / 100% Load Step, Recovery Time < 300 $\mu\text{s}$	$\pm 5$					

### SPECIFICATION Input 40 - 160 VDC (72/110 Vin nom) ; K = with Heatsink

TYPE		AER10-110D12 AER10-110D12/K			AER10-110D15 AER10-110D15/K		
ORDER NUMBER		11 75 11 1722 1 11 75 11 1725 4			11 75 11 1732 4 11 75 11 1735 7		
CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	40...160					
	Input Voltage Range	40...170 ( $t \leq 100\text{ ms}$ )					
	Under Voltage Turn-on (typical)	40					
	Under Voltage Turn-off (typical)	37					
	Input Current @ Full Load		106			106	
	Input Current @ No Load (typical)	10					
	Standby Input Current (typical)	2,5					
OUTPUT	Output Voltage	$\pm 12$			$\pm 15$		
	Output Current (typical)	$\pm 417$			$\pm 335$		
	Output Power	10					
	Max. Capacitive Load			150#			100#
	Efficiency @ Full Load	86			86		
	Short Circuit Current (typical)	hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
	Transient Response 75% / 100% Load Step, Recovery Time < 300 $\mu\text{s}$	$\pm 5$					

# For each output

# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$ , unless otherwise specified.

## SINGLE OUTPUT – A-PINNING

### SPECIFICATION Input 9 - 36 VDC (12/24 Vin nom) ; K = with Heatsink

	TYPE		AER10A-24S05 AER10A-24S05/K			AER10A-24S12 AER10A-24S12/K			AER10A-24S15 AER10A-24S15/K			AER10A-24S24 AER10A-24S24/K					
			ORDER NUMBER			11 75 11 1217 8 11 75 11 1218 3			11 75 11 1227 2 11 75 11 1228 6			11 75 11 1237 5 11 75 11 1238 9			11 75 11 1247 8 11 75 11 1248 3		
			CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
INPUT	Input Voltage Operating	V	9...36														
	Input Voltage Range	V	9...50 (t ≤ 100 ms)														
	Under Voltage Turn-on (typical)	V	9														
	Under Voltage Turn-off (typical)	V	7,5														
	Input Current @ Full Load	mA		496			485			481			474				
	Input Current @ No Load (typical)	mA	25														
	Standby Input Current (typical)	mA	2,5														
OUTPUT	Output Voltage	V	5			12			15			24					
	Output Current (typical)	mA	2000			835			670			417					
	Output Power	W	10														
	Max. Capacitive Load	μF			2200			330			220			100			
	Efficiency @ Full Load	%		84			86			87			88				
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery														
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5														

### SPECIFICATION Input 18 - 75 VDC (36/48 Vin nom) ; K = with Heatsink

	TYPE		AER10A-48S05 AER10A-48S05/K			AER10A-48S12 AER10A-48S12/K			AER10A-48S15 AER10A-48S15/K			AER10A-48S24 AER10A-48S24/K					
			ORDER NUMBER			11 75 11 1517 5 11 75 11 1518 9			11 75 11 1527 8 11 75 11 1528 3			11 75 11 1537 2 11 75 11 1538 6			11 75 11 1547 5 11 75 11 1548 9		
			CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
INPUT	Input Voltage Operating	V	18...75														
	Input Voltage Range	V	18...100 (t ≤ 100 ms)														
	Under Voltage Turn-on (typical)	V	18														
	Under Voltage Turn-off (typical)	V	16														
	Input Current @ Full Load	mA		245			240			241			242				
	Input Current @ No Load (typical)	mA	15														
	Standby Input Current (typical)	mA	2,5														
OUTPUT	Output Voltage	V	5			12			15			24					
	Output Current (typical)	mA	2000			835			670			417					
	Output Power	W	10														
	Max. Capacitive Load	μF			2200			330			220			100			
	Efficiency @ Full Load	%		85			87			87			86				
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery														
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5														

### SPECIFICATION Input 40 - 160 VDC (72/110 Vin nom) ; K = with Heatsink

	TYPE		AER10A-110S05 AER10A-110S05/K			AER10A-110S12 AER10A-110S12/K			AER10A-110S15 AER10A-110S15/K			AER10A-110S24 AER10A-110S24/K					
			ORDER NUMBER			11 75 11 1717 9 11 75 11 1718 4			11 75 11 1727 3 11 75 11 1728 7			11 75 11 1737 6 11 75 11 1738 1			11 75 11 1747 9 11 75 11 1748 4		
			CHARACTERISTIC	Unit	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
INPUT	Input Voltage Operating	V	40...160														
	Input Voltage Range	V	40...170 (t ≤ 100 ms)														
	Under Voltage Turn-on (typical)	V	40														
	Under Voltage Turn-off (typical)	V	37														
	Input Current @ Full Load	mA		111			107			107			107				
	Input Current @ No Load (typical)	mA	10														
	Standby Input Current (typical)	mA	2,5														
OUTPUT	Output Voltage	V	5			12			15			24					
	Output Current (typical)	mA	2000			835			670			417					
	Output Power	W	10														
	Max. Capacitive Load	μF			2200			330			220			100			
	Efficiency @ Full Load	%		82			85			85			85				
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery														
	Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5														

# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## DUAL OUTPUT – A-PINNING

### SPECIFICATION Input 9 - 36 VDC (12/24 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10A-24D12 AER10A-24D12/K			AER10A-24D15 AER10A-24D15/K		
			ORDER NUMBER			ORDER NUMBER		
			Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	V	9...36					
	Input Voltage Range	V	9...50 (t ≤ 100 ms)					
	Under Voltage Turn-on (typical)	V	9					
	Under Voltage Turn-off (typical)	V	7,5					
	Input Current @ Full Load	mA	485			481		
	Input Current @ No Load (typical)	mA	25					
	Standby Input Current (typical)	mA	2,5					
OUTPUT	Output Voltage	V	±12			±15		
	Output Current (typical)	mA	±417			±335		
	Output Power	W	10					
	Max. Capacitive Load	μF	150#			100#		
	Efficiency @ Full Load	%	86			87		
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5						

### SPECIFICATION Input 18 - 75 VDC (36/48 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10A-48D12 AER10A-48D12/K			AER10A-48D15 AER10A-48D15/K		
			ORDER NUMBER			ORDER NUMBER		
			Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	V	18...75					
	Input Voltage Range	V	18...100 (t ≤ 100 ms)					
	Under Voltage Turn-on (typical)	V	18					
	Under Voltage Turn-off (typical)	V	16					
	Input Current @ Full Load	mA	234			238		
	Input Current @ No Load (typical)	mA	15					
Standby Input Current (typical)	mA	2,5						
OUTPUT	Output Voltage	V	±12			±15		
	Output Current (typical)	mA	±417			±335		
	Output Power	W	10					
	Max. Capacitive Load	μF	150#			100#		
	Efficiency @ Full Load	%	89			88		
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5						

### SPECIFICATION Input 40 - 160 VDC (72/110 Vin nom) ; K = with Heatsink

	TYPE	Unit	AER10A-110D12 AER10A-110D12/K			AER10A-110D15 AER10A-110D15/K		
			ORDER NUMBER			ORDER NUMBER		
			Min	Typ	Max	Min	Typ	Max
INPUT	Input Voltage Operating	V	40...160					
	Input Voltage Range	V	40...170 (t ≤ 100 ms)					
	Under Voltage Turn-on (typical)	V	40					
	Under Voltage Turn-off (typical)	V	37					
	Input Current @ Full Load	mA	106			106		
	Input Current @ No Load (typical)	mA	10					
Standby Input Current (typical)	mA	2,5						
OUTPUT	Output Voltage	V	±12			±15		
	Output Current (typical)	mA	±417			±335		
	Output Power	W	10					
	Max. Capacitive Load	μF	150#			100#		
	Efficiency @ Full Load	%	86			86		
	Short Circuit Current (typical)		hiccup mode 150 %, pulse approx 0,3Hz, automatic recovery					
Transient Response 75% / 100% Load Step, Recovery Time < 300 μs	%	±5						


# For each output

# TECHNICAL DATA


For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## MECHANICAL DETAILS

1. Dimensions are in mm [inches].
2. Tolerance:  $X.X \pm 0.75$  ( $X.XX \pm 0.03$ )  
 $X.XX \pm 0.25$  ( $X.XXX \pm 0.01$ )
3. Pin diameter  $\varnothing 1.0 \pm 0.05$  ( $0.04 \pm 0.002$ )

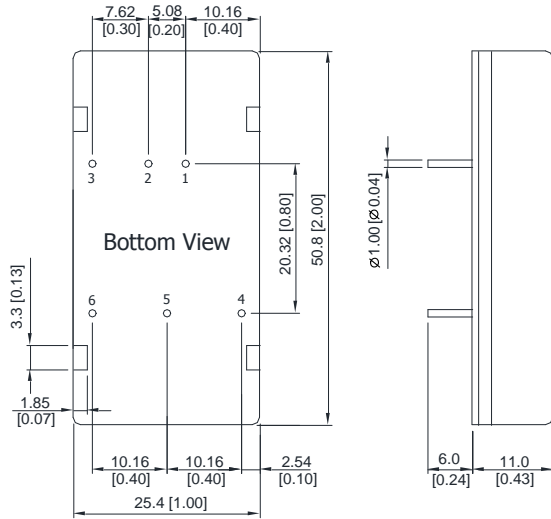

## A-Pinning

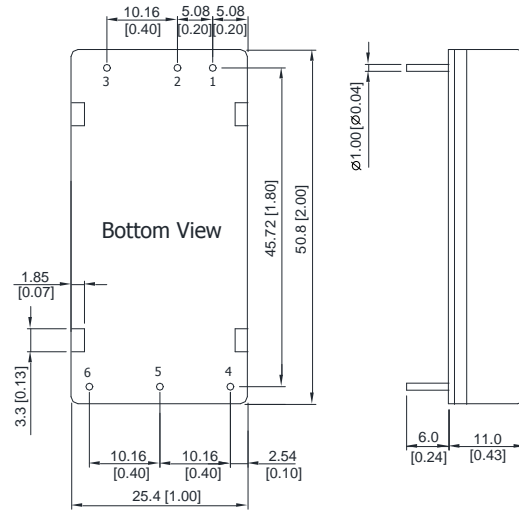

Case Material: Red Copper, Powder Coating  
 Base Material: FR4 PCB (flammability to UL 94V-0 rated)  
 Insulated Frame Material: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)  
 Pin Material: Tinned Copper  
 Potting Material: Epoxy (flammability to UL 94V-0 rated)

## PINNING

Pin	Single Output	Dual Output
1	+V <sub>in</sub>	+V <sub>in</sub>
2	-V <sub>in</sub>	-V <sub>in</sub>
3	Remote On/Off	Remote On/Off
4	+V <sub>out</sub>	+V <sub>out</sub>
5	Trim	Common
6	-V <sub>out</sub>	-V <sub>out</sub>

## PINNING


Pin	Single Output	Dual Output
1	+V <sub>in</sub>	+V <sub>in</sub>
2	-V <sub>in</sub>	-V <sub>in</sub>
3	Remote On/Off	Remote On/Off
4	+V <sub>out</sub>	+V <sub>out</sub>
5	-V <sub>out</sub>	Common
6	Trim	-V <sub>out</sub>

## MECHANICAL DETAILS


### Heatsink (Option, -HS)

The advantages of adding a heatsink are:

1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.

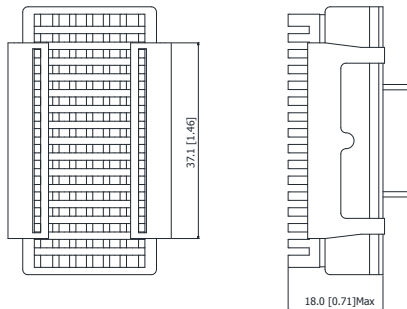

## A-Pinning

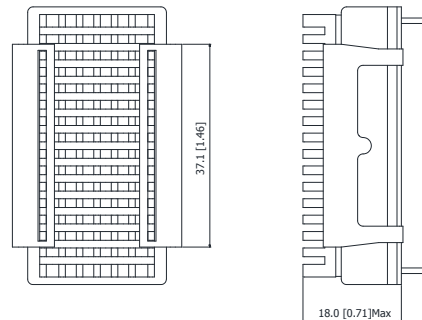

Heatsink Material: Aluminum  
 Finish: Black Anodized Coating  
 Weight: 9 g

# TECHNICAL DATA


For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## NOTES

- Specifications typical at  $T_a = +25^{\circ}\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75 % to 100 %.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact factory.
- To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required.  
Suggested capacitor: 24XXX: CHEMI-CON KY Series 390  $\mu\text{F}/63\text{ V}$ .  
48XXX: CHEMI-CON KY Series 330  $\mu\text{F}/100\text{ V}$ .  
110XXX: CHEMI-CON KXG Series 220  $\mu\text{F}/250\text{ V}$ .
- That "natural convection" is about 20 LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice.

## EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below

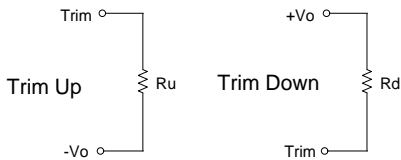

AER10-XXS05 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	137.88	61.93	36.61	23.95	16.35	11.29	7.67	4.96	2.85	1.16	kOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	108.09	48.39	28.49	18.54	12.56	8.58	5.74	3.61	1.95	0.62	kOhms

AER10-XXS12 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	419.81	187.68	110.30	71.61	48.40	32.93	21.87	13.58	7.13	1.98	kOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	344.74	154.37	90.92	59.19	40.15	27.46	18.39	11.59	6.31	2.07	kOhms

AER10-XXS15 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	602.92	269.91	158.91	103.41	70.10	47.90	32.05	20.15	10.90	3.50	kOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	482.88	215.89	126.89	82.40	55.70	37.90	25.18	15.65	8.23	2.30	kOhms

AER10-XXS24 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	598.97	267.93	157.59	102.42	69.31	47.25	31.48	19.66	10.46	3.11	kOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	486.83	217.87	128.21	83.38	56.49	38.56	25.75	16.14	8.67	2.69	kOhms



# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## REMOTE ON/OFF

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0 V to 1,2 V. A logic high is 3,5 V to 12 V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100 $\mu\text{A}$ .



When not in use, leave Remote pin not-connected.

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On		3,5 V ~ 12 V or Open Circuit			
Converter Off		0 V ~ 1,2 V or Short Circuit			
Control Input Current (on)	$V_{ctrl} = 5,0\text{ V}$	---	0,5	---	mA
Control Input Current (off)	$V_{ctrl} = 0\text{ V}$	---	-0,5	---	mA
Control Common		Referenced to Negative Input			
Standby Input Current	Nominal Vin	---	2,5	---	mA

## TEST SETUP

### Peak-to-Peak Output Noise Measurement Test

Use a 1  $\mu\text{F}$  ceramic capacitor and a 10  $\mu\text{F}$  tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

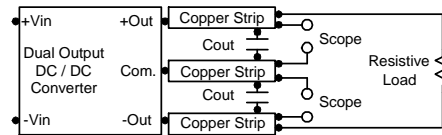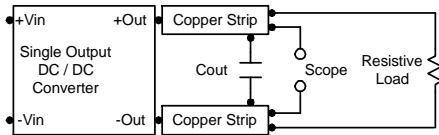

## TECHNICAL NOTES

### Overload Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

### Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.



### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1  $\Omega$  at 100 kHz) capacitor of 4,7  $\mu\text{F}$  for the 24 V input devices, a 2,2  $\mu\text{F}$  for the 48 V devices and a 1  $\mu\text{F}$  for the 110 V devices.

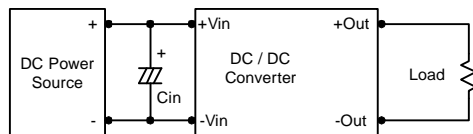

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4,7  $\mu\text{F}$  capacitors at the output.

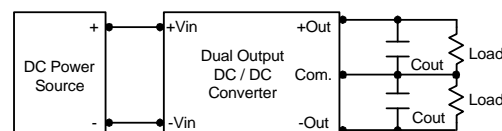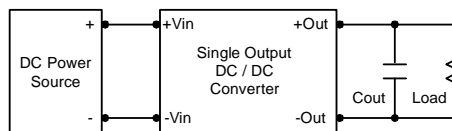

### Maximum Capacitive Load

The AER10 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the output data.




# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$ , unless otherwise specified.

## Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below  $105^{\circ}\text{C}$ . The derating curves are determined from measurements obtained in a test setup.




Parameter	Conditions / Model	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Ambient Temperature Range Natural Convection (see note 6 page 7) Nominal $V_{in}$ , Load 100% $I_{nom}$ . (for Power Derating see relative Derating Curves)	AER10-48D12	-40	90	93	$^{\circ}\text{C}$
	AER10-24S24 AER10-48D15		88	92	
	AER10-24S15, AER10-48S12, AER10-48S15 AER10-24D15		87	90	
	AER10-24S12, AER10-48S24, AER10-24D12, AER10-110D12, AER10-110D15		85	89	
	AER10-48S05, AER10-110S12, AER10-110S15, AER10-110S24		84	88	
	AER10-24S05		82	86	
	AER10-110S05		78	83	
	Thermal Impedance		Natural Convection without Heatsink	12,1	
Natural Convection with Heatsink		9,8	---	---	$^{\circ}\text{C}/\text{W}$
100LFM Convection without Heatsink		9,2	---	---	$^{\circ}\text{C}/\text{W}$
100LFM Convection with Heatsink		5,4	---	---	$^{\circ}\text{C}/\text{W}$
200LFM Convection without Heatsink		7,8	---	---	$^{\circ}\text{C}/\text{W}$
200LFM Convection with Heatsink		4,5	---	---	$^{\circ}\text{C}/\text{W}$
400LFM Convection without Heatsink		5,2	---	---	$^{\circ}\text{C}/\text{W}$
400LFM Convection with Heatsink		3,0	---	---	$^{\circ}\text{C}/\text{W}$


# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.


## POWER DERATING CURVE

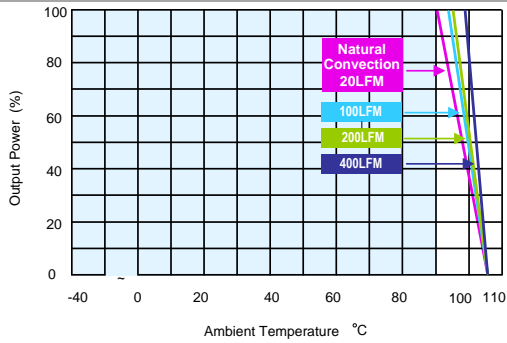


AER10-48D12 Derating Curve without Heatsink

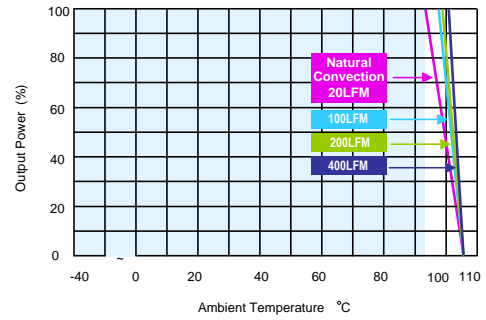


AER10-48D12 Derating Curve with Heatsink

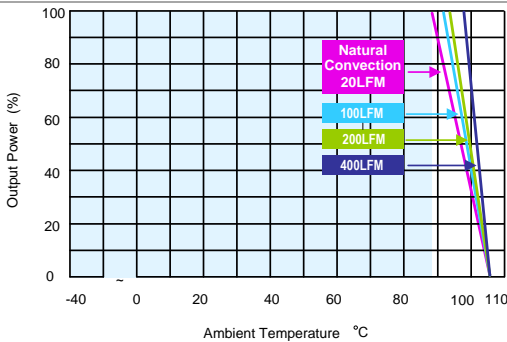


AER10-24S24, AER10-48D15 Derating Curve without Heatsink

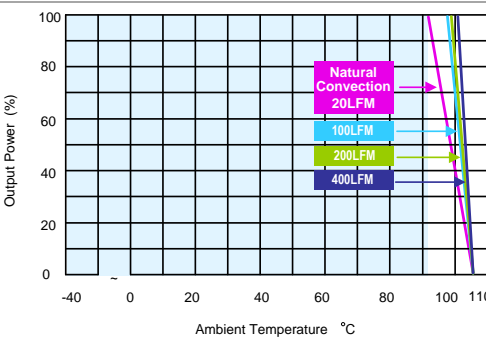


AER10-24S24, AER10-48D15 Derating Curve with Heatsink

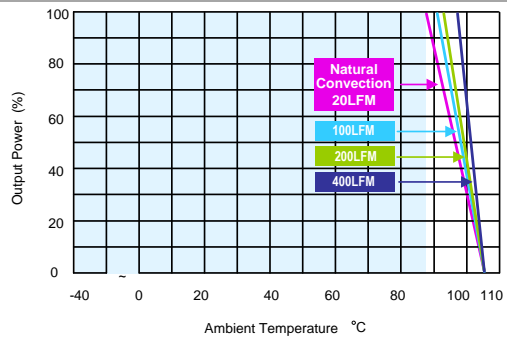


AER10-24S15, AER10-24D15, AER10-48S12, AER10-48S15 Derating Curve without Heatsink

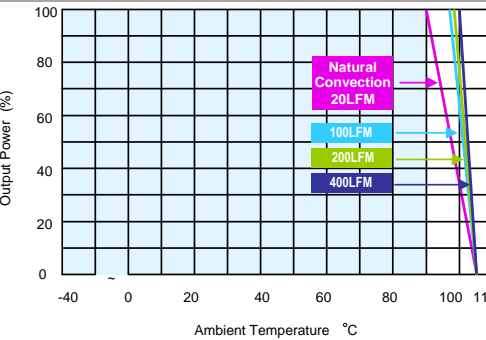

AER10-24S15, AER10-24D15, AER10-48S12, AER10-48S15 Derating Curve with Heatsink

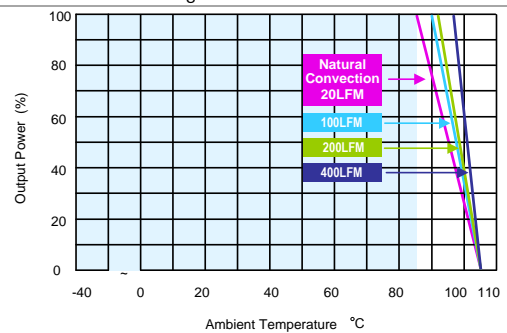

AER10-24S12, AER10-24D12, AER10-48S24, AER10-110D12, AER10-110D15 Derating Curve without Heatsink

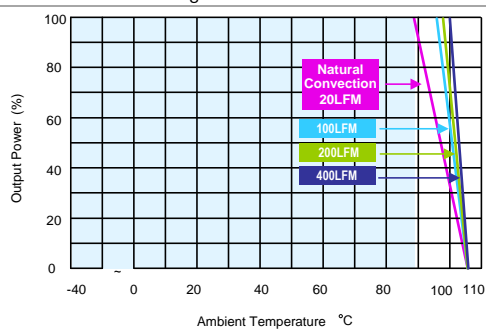

AER10-24S12, AER10-24D12, AER10-48S24, AER10-110D12, AER10-110D15 Derating Curve with Heatsink

# TECHNICAL DATA

For  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_{in\ nom}$ ,  $I_{out\ nom}$  unless otherwise specified.

## POWER DERATING CURVE

